Operating Your System
With The Medius TX-1000

COMPLETE CONTROL™

Universal Remote Control®

This remote control was
Custom Programmed for you by:

For questions about your Custom Programming call:

Custom Programming of a complex home theater and/or a multi-room system is one of the most challenging tasks within an audio/video installation. It involves an intimate knowledge of how the components interact and exact details on the proper sequences of control.

Only a Complete Control dealer has the requisite experience and training to quickly and effectively customize a remote control for true automated operation.

Congratulations on your choice!

TX-1000 Owners Manual © 2006-2013 Universal Remote Control, Inc.
Front Cover Photo courtesy of Robert Ridenour of Connected Technologies, www.connected-technologies.com

The information in this owner's manual is copyright protected. No part of this manual may be copied or reproduced in any form without prior written consent from Universal Remote Control, Inc.

UNIVERSAL REMOTE CONTROL, INC. SHALL NOT BE LIABLE FOR OPERATIONAL, TECHNICAL OR EDITORIAL ERRORS/OMISSIONS MADE IN THIS MANUAL.

The information in this owner's manual may be subject to change without prior notice.

Complete Control is a registered trademark of Universal Remote Control, Inc.
Entertainment Made Simple is a trademark of Universal Remote Control, Inc.

All other brand or product names are trademarks or registered trademarks of their respective companies or organizations.

Universal Remote Control®

Universal Remote Control, Inc.
500 Mamaroneck Avenue, Harrison, NY 10528
Phone: (914) 835-4484 Fax: (914) 835-4532

Table Of Contents

Introduction 1

LCD Touch Screen 1

Optional RF “No Rules” Operation 2

Installing Batteries 3

Programming the Medius 4

Selecting a New “Activity” 5

Using the Medius to Control an “Activity” 6

Displaying the Setup Screen 7

Selecting from the Setup Screen 7

Setting the TIME 8

Setting the LCD 8

Light Settings 10

Sound Volume 10

System Settings 11

Calibrating the Touch Screen 11

Version Information Displays 12

Warranty 12

End User Agreement 15

Specifications 15

Congratulations!

You've purchased a unique synthesis of hardware and software engineering, the Complete Control Medius. The Medius achieves a magnificent combination of power and flexibility, simplifying and automating operation of even the most complex system.

One Touch Multi-Color Backlighting

Simply press the LIGHT button to backlight the screen.

Integrated Sound Signaling

The Medius incorporates a small speaker for beeps. Anytime you press a button, the Medius signals that it has understood your command with a beep sound.

LCD Touch Screen

The Medius is equipped with a bright easy to read LCD touch screen which your installer will customize for your system. The screen buttons change based on your activity. To use a button, simply tap the screen with the tip of your finger. It is not necessary to use a stylus from a PDA.

Simply tap the interactive touch screen buttons to operate them.

The busy symbol appears when Medius is controlling your system. It will blink as long as the Medius is transmitting a command or a series of commands (a macro) to your system. While it is transmitting, the Medius will not respond to another button press.

When the Medius is finished controlling your system, the indicator will disappear, and you can press any button.

Optional RF "No Rules" Operation

In combination with a Complete Control RF Base Station, the Medius can control your system without being in line-of-sight of the equipment.

Any of the Complete Control MRF series of RF base stations is compatible with the Medius. Both incorporate RF addressing. RF Addressing gives you the ability to control equipment locations throughout your home, even if they are concealed in other rooms or are behind closed doors.

1. The Medius sends radio waves in every direction, so you don't have to point the remote anymore!

2. The RFX-150 RF Sensor can be freely positioned for optimal reception.

3. The MRF-300's built-in Front Blaster sends commands to components in the same cabinet space as the MRF-300.



4. Self-adhesive "Flashers" affix to the Infrared sensors on the front panels of your components. The Flashers relay commands to components out of sight of the MRF-300's Front Blaster. The flashers plug in to the MRF-300's rear flasher line outputs via their 10 foot cables. Uniquely, the MRF-300 can also connect to a components rear panel IR input via its adjustable IR Line Outputs.

Installing Batteries

Open the battery cover by depressing the release latch and pulling back the cover on the back of the control. Remove the cover.

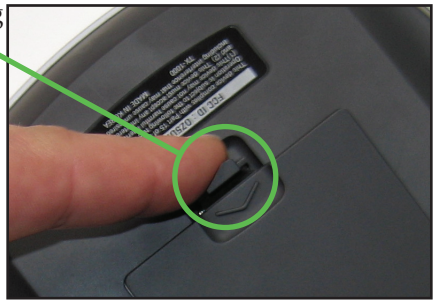

Observe the + and - polarity indications inside the battery compartment.

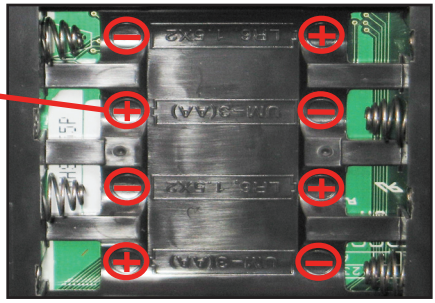

Place the four AA batteries into their positions in the battery compartment observing the + and - polarity indicators on the batteries.

Now, replace the battery cover by inserting the hinged end in first, then snapping the cover back into place.

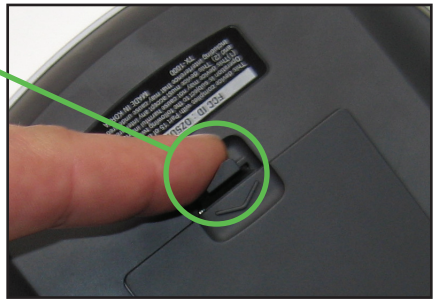

Programming the Medius

The Medius is programmed via a Windows PC equipped with a USB port (programming cable included), using our proprietary software, TX-1000 Editor. You can download this software from our website:

www.universalremote.com

Basic setup takes only a short time with this software. However, to fully automate an audio/video system the user must have a detailed knowledge of each component, you the user (and your preferences) and how the system is connected and operated. We highly recommend that you use a professional audio/video installer to program your Medius so you will be able to enjoy all the benefits of the Medius as well as one touch operation via macros.

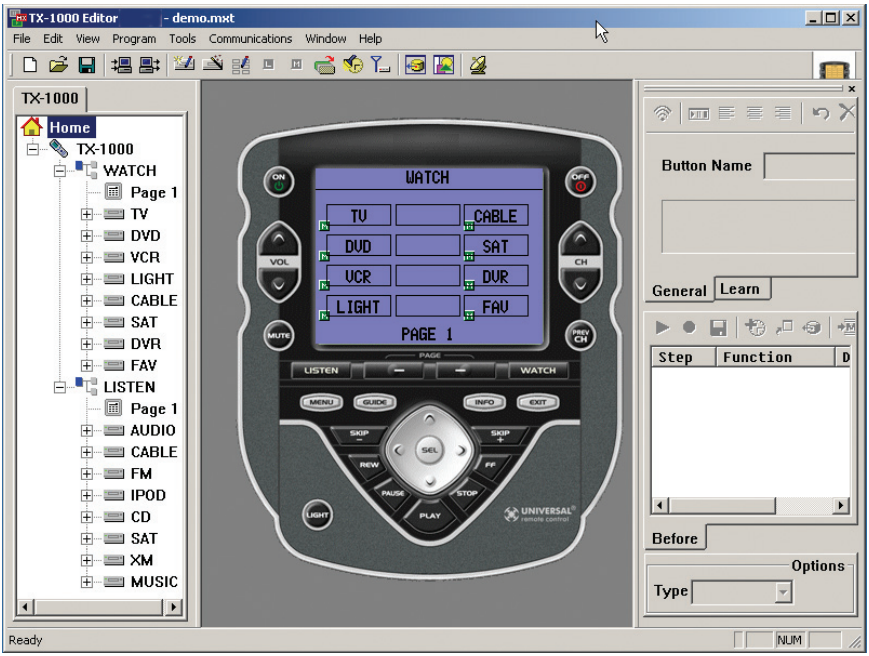

Selecting a New "Activity"

The Medius's WATCH and LISTEN buttons display the activities you can control with your Medius. When you want to watch something else (a DVD movie, a videotape or an HDTV broadcast), simply press the WATCH button and select the new activity. When you want to listen to the radio or to a CD, touch the LISTEN button and select what you would like to listen to.

Your installer will have programmed the button you pressed to totally configure your system to watch or listen to whatever you selected. Now, the screen will change, and all of the LCD buttons will be reconfigured to give you full control of your system while watching or listening to your selection!

When you press the LISTEN button, you can see the most frequently used activities you have for listening in your system.

Press either of the PAGE buttons to see any other available choices. You may have only one page or your system may have several pages of "Listen Activities".

Press either of the PAGE buttons to see any other available choices. You may have only one page or your system may have several pages of "Watch Activities".

When you press the WATCH button, you can see the most frequently used activities you have for watching the sources in your system.

Using the Medius to Control an "Activity"

Once you've selected a new activity, the Medius displays the title of the activity at the top of the screen. Below the title, the LCD displays the customized names of any special features you need for the activity. All the hard buttons of the Medius have now changed to functions optimized for this activity.

The Title displays what activity you can control.

The touch screen button labels describe special features for this activity.

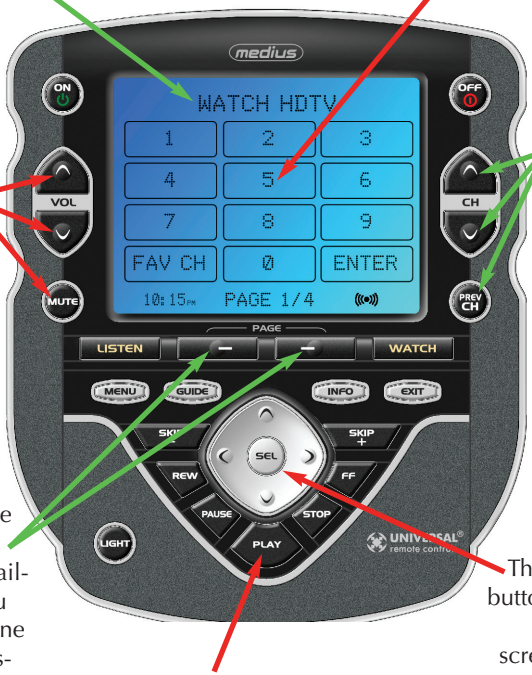

The Volume and Mute buttons always control the sound regardless of what screen is displayed.

The Channel and Previous Channel buttons are programmable. They will change channels when you have selected an activity like Watching HDTV .

Press either of the PAGE buttons to see any other available choices. You may have only one page or your system may have several pages of special features for this activity.

The 4 way cursor buttons enable you to navigate on screen guides and menus with ease.

The transport buttons (Play, Stop, Back, Ahead and Pause) operate when the selected activity requires them (for example, if you watch HDTV with a TiVo type of DVR, these buttons will control the DVR).

Displaying the Setup Screen

You can adjust the settings of the Medius whenever you like by pressing and holding both the WATCH and the SEL button at the same time for three seconds. When you do, the screen will change to the SETUP screen. If you do not press any button on the SETUP screen within 30 seconds, the Medius will time out and automatically return to normal operation. You can return to normal operation before that by pressing either the WATCH or the LISTEN button.

At the same time, press and hold both the WATCH button and the SEL button. When the SETUP screen appears, you can release the two buttons.

Selecting from the Setup Screen

Simply touch the button for the setting you'd like to adjust:

TIME - The time displayed on the Medius.
LCD - The appearance of the screen.
LIGHT - What the LIGHT button does.
SOUND - The beeps the Medius can make.
SYSTEM - The battery low warning.
TOUCH - Calibration of the touch screen.
VER - No adjustments are possible. Displays factory info.



Setting the TIME

You can correct the time displayed by changing the settings on this screen.

To activate the AM/PM setting, press this button. .

To activate the HOUR setting, press this button.

To activate the MINUTE setting, press this button.

To SAVE any changes you have made, press SAVE.

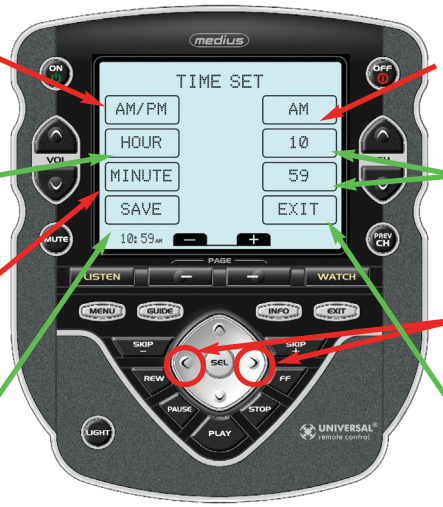

After activating AM/PM, press this button to change AM/PM.

After activating them, change the HOURS or MINUTES by observing these buttons and adjusting with the LEFT and RIGHT arrow keys.

To exit without saving any changes you have made, press EXIT.

Setting the LCD

With these settings, you set the screen's appearance when the Medius is not in use. You can select either a blank or constant LCD display. Additionally, you can control the contrast of the screen and the color of the backlighting.

To activate the LCD On/Off setting, press this button. .

To activate the CONTRAST setting, press this button.

For COLOR settings, see the next page.

To SAVE any changes you have made, press SAVE.

To exit without saving any changes you have made, press EXIT.

After activating LCD On/Off, press this button to change whether the LCD is displayed when not in use.

Press the TIMEOUT button if you wish to change how much time must pass before the Medius turns the LCD off.

After activating change the CONTRAST by observing this button and adjusting with the LEFT and RIGHT arrow keys.

Overriding COLOR Settings

Your professional installer may have set the color of the backlighting to display different colors when you change activities. You can override the settings he/she made in the TX-1000 software with one constant backlighting color for all activities

Press the COLOR button to activate the COLOR Settings row of buttons.

Normally, this button displays S/W to indicate that the colors are controlled by the software (S/W). To override these settings, after activating the COLOR row, press the S/W button to change it to USER. Once the button displays USER, press the EDIT button to change the backlight color.

After pressing the EDIT button shown above, the COLOR SET screen appears. Here's how the settings are adjusted:

To activate RED, first press this button.

To activate GREEN, first press this button.

To activate BLUE, first press this button.

To SAVE any changes you have made, press SAVE.

After activating them, change the RED, GREEN or BLUE by observing these buttons and adjusting with the LEFT and RIGHT arrow keys.

To exit without saving any changes you have made, press EXIT.

Light Settings

You can adjust the backlighting of the remote in three additional ways:

1. You can turn on/off the LCD backlighting.
2. You can turn on/off the hard button backlighting.
3. You can select the amount of time the lighting stays on after the last button press.

To activate LCD backlighting, first press this button.

To activate the hard button backlighting, first press this button.

To activate the TIMER setting, first press this button.

To SAVE any changes you have made, press SAVE.

To exit without saving any changes you have made, press EXIT.

Once the LCD row is activated, change whether the backlighting is on or off by pressing this button.

Once the BUTTON row is activated, change whether the backlighting is on or off by pressing this button.

Once the TIMER row is activated, change the amount of time the backlighting will stay on by using the LEFT and RIGHT arrow keys.

Sound Volume

Your Medius beeps whenever a button is pressed. However, you can adjust the volume to any level you like by adjusting the volume control here.

To SAVE any changes you have made, press SAVE.

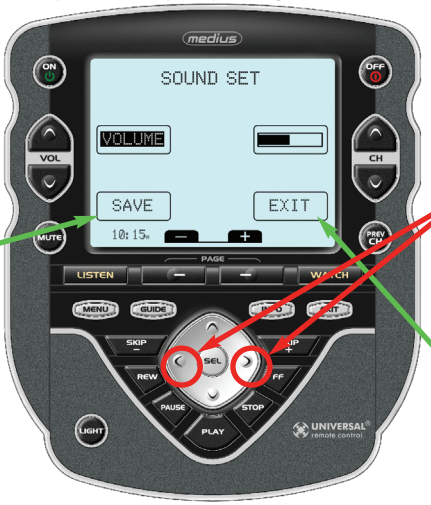

Adjust the volume of the beep by using the LEFT and RIGHT arrow keys.

To exit without saving any changes you have made, press EXIT.

System Settings

You can set your Medius to display the Low Battery warning at a power level between 0% and 20% (in 5% increments).

To activate the battery low warning row, press the WARN button.

The amount of available memory left to utilize is displayed in this row.

To SAVE any changes you have made, press SAVE.

The current battery power remaining is displayed here.

Once the WARN row has been activated, use the LEFT and RIGHT arrow keys to cycle through the available battery level settings (0%, 5%, 10%, 15% or 20%).

To exit without saving any changes you have made, press EXIT.

Calibrating the Touch Screen

If you find that your Medius is not responding to finger presses accurately, you can calibrate the touch screen with this setting. It works like this:

1. Press the TOUCH button on the SETUP screen.
2. The screen changes and displays a small + symbol in the top left corner.
3. Press the + symbol with the tip of your fingernail as accurately as you can.
4. The + symbol now moves to the top right corner, then the bottom left corner, the bottom right corner and finally the center of the screen. Each time, press the + symbol as accurately as you can.
5. When the process is complete, the screen will return to the SETUP screen.

Anytime you want, you can exit the Calibration screen by pressing the WATCH button.

Version Information Displays

Should you be curious, the Version indicates what firmware and software versions were used to program your Medius.

To exit, press EXIT.

Limited Warranty Statement

1. Limited Warranty and Disclaimers
Universal Remote Control, Inc. ("URC") warrants that the URC equipment shall be free from defects in material and workmanship under normal usage for one (1) year from purchase when such is purchased from URC. **This limited warranty is valid only in the United States of America.** URC warrants that the software will substantially conform in any material respect to its functional specifications at the time of delivery. URC SHALL NOT BE LIABLE FOR OPERATIONAL, TECHNICAL OR EDITORIAL ERRORS AND/OR OMISSIONS MADE IN THE URC DOCUMENTATION. URC DOES NOT WARRANT THAT THE URC SOFTWARE IS BUG-FREE OR ERROR FREE OR THAT THERE ARE NO ERRORS/BUGS IN THE URC SOFTWARE.

URC warrants that at the time of purchase the URC equipment and the URC software complied with all applicable regulations and policies of the Federal Communications Commissions ("FCC") regarding electromagnetic interference caused by electronic/computing devices and to the extent that the URC equipment and/or the URC software fails to so comply, URC shall, at its own expense, take all reasonable measures to promptly cause such to comply.

URC equipment purchases from other than an authorized URC dealer or distributor are without warranty.

THIS LIMITED WARRANT DOES NOT COVER TECHNICAL ASSISTANCE FOR HARDWARE OR SOFTWARE USAGE EXCEPT AS EXPRESSLY PROVIDED FOR HEREIN, THE EQUIPMENT, SOFTWARE AND DOCUMENTATION OF URC ARE SUPPLIED "AS IS" WITHOUT ANY WARRANTY, EXPRESS, STATUTORY OR IMPLIED, OF ANY KIND. TO THE MAXIMUM EXTENT PERMITTED BY

APPLICABLE LAW, URC EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESS, STATUTORY OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. URC DOES NOT WARRANT, GUARANTEE, OR MAKE ANY REPRESENTATIONS REGARDING THE USE OF, OR THE RESULTS OF THE USE OF, THE EQUIPMENT, SOFTWARE OR DOCUMENTATION IN TERMS OF CORRECTNESS, ACCURACY, RELIABILITY OR OTHERWISE.

EXCEPT AS EXPRESSLY PROVIDED FOR HEREIN, TECHNICAL SERVICES ARE SUPPLIED "AS IS", WITHOUT ANY WARRANTY, EXPRESS, STATUTORY OR IMPLIED, OF ANY KIND. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, URC EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESS, STATUTORY OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF QUALITY OR REASONABLE SKILL AND CARE, OR OUTCOME OR RESULTS.
WITHOUT IN ANY WAY LIMITING THE GENERALITY OF THE OTHER PROVISIONS HEREIN, WARRANTY DOES NOT COVER: (I) DAMAGE FROM MISUSE, NEGLECT OR ACTS OR NATURE, (II) MODIFICATIONS, (III) INTEGRATION WITH THIRD PARTY CONTENT (IV) BEYOND THE WARRANTY PERIOD AND/ OR FAILURE TO FOLLOW URC WARRANTY CLAIM PROCEDURE.

The warranty limitations and warranty disclaimers may not apply to end user in whole or in part, where such are restricted or excluded by applicable law and such shall apply to the maximum extent permitted by applicable law.

In the event of any warranty claim, URC will, at its sole option, repair the URC equipment using new or comparable rebuilt parts, or exchange the URC equipment for new or rebuilt equipment. **In the event of a defect, these are the end user's exclusive remedies.**

All the URC equipment returned for service, exchange or repair require an RGA number. To obtain an RGA number, you must complete a Return Request Form which you may obtain by calling (914) 835-4484 or contacting URC at returnrequest@universalremote.com. To obtain warranty service, end user must deliver the URC equipment, freight prepaid, in its original packaging or packaging affording adequate protection to URC at 420 Columbus Avenue, Valhalla, NY 10595. It is end user's responsibility to backup any macro programming, artwork, software or other materials that may have been programmed into the unit. It is likely that such data, software, or other materials will be lost during service and URC will not be responsible for any such damage or loss. A dated purchase receipt, bill of sale, installation contract or other verifiable proof of purchase is required. For the URC equipment support and other important information, please visit URC's website available at www.universalremote.com or call the Customer Service Center at (914) 835-4484.

This limited warranty only covers the URC equipment issues caused by defects in material or workmanship during ordinary consumer use. It does not cover product issues caused by any other reason, including but not limited to product issues due to commercial use, acts of God, third-party installation, misuse, limitations of technology, or modification of or to any part of the URC equipment. This limited warranty does not cover the URC equipment sold as used, as is, refurbished, so called "B stock" or consumables (such as batteries). This limited warranty is invalid if the factory applied serial number has been altered or removed from the URC equipment. **This limited warranty specifically excludes the URC equipment sold by unauthorized resellers.**

With the exception of URC's IR-only, broad-based consumer remotes, none of URC's PC programmable remotes or any of our Total Control® whole-house equipment are authorized for online internet sales. Buying URC's PC programmable remotes or any of our Total Control® whole-house equipment online means buying equipment that does not have a URC's limited warranty. Such equipment is not eligible for URC tech support or software support, either.

2. URC'S Limitations of Liability

IN NO EVENT SHALL URC BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL, EXEMPLARY, PUNITIVE OR CONSEQUENTIAL DAMAGES OF ANY KIND OR LOSS OF PROFITS OR BUSINESS OPPORTUNITY, EVEN IF URC IS ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

IN NO EVENT SHALL URC BE LIABLE FOR LOSS OF OR DAMAGE TO DATA, COMPUTER SYSTEMS OR COMPUTER PROGRAMS.
URC'S LIABILITY, IF ANY, FOR DIRECT DAMAGES OF ANY FORM SHALL BE LIMITED TO ACTUAL DAMAGES, NOT IN EXCESS OF AMOUNTS PAID BY END USER FOR THE URC EQUIPMENT.

IN NO EVENT SHALL URC BE LIABLE FOR ANY EVENTS BEYOND ITS CONTROL, INCLUDING ANY INSTANCE OF FORCE MAJEURE.
IN NO EVENT SHALL URC BE LIABLE FOR THE ACTS OR OMISSIONS OF END USER OR ANY THIRD PARTY.

THE LIMITATIONS OF LIABILITY MAY NOT APPLY TO END USER IN WHOLE OR IN PART, WHERE SUCH ARE RESTRICTED LIMITED OR EXCLUDED BY APPLICABLE LAW AND SUCH SHALL APPLY TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW.

URC SHALL NOT BE HELD RESPONSIBLE FOR THE STATEMENTS MADE BY OTHERS.

SOME STATES OR JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE

ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO END USER. THIS LIMITED WARRANTY GIVES END USER SPECIFIC LEGAL RIGHTS AND END USER MAY HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE OR JURISDICTION TO JURISDICTION.

End User Agreement

The terms and conditions of the End User Agreement available at www.universalremote.com/eua.php shall apply.

Specifications

Memory - 4 Megabits of Flash Memory (for User Configuration)
Devices - Flexible, typically can support up to 40 Devices
Pages - Flexible, typically can support up to 40 Pages on each Device
Learning Capability - Standard frequencies (15kHz to 460kHz)
Macro Capability - Up to 255 steps each, however nesting is allowed
IR Range (Line of Sight via Infrared): 30-50 feet, depending on the environment
RF Range (radio frequency): 50 to 100 feet, depending upon the environment
RF Frequency: 418MHz
Weight: 31.4 ounces (with batteries)
Size: 6.46″ H x 5.39″ W x 1.66″ D
Batteries: 4 AA Batteries

500 Mamaroneck Avenue, Harrison, NY 10528
Phone: (914) 835-4484 Fax: (914) 835-4532
www.universalremote.com

OCE-0044A REV02